



Safety advice





Safety advice

Safety note:

**General provisions with pressurized equipment.
In case of visible faults, the device must be taken out of service immediately.**

General test data

Pressure testing of the flow control type 500-2000 and filter type 500

Pressure-resistant:

at 20 ° to 10 bar

at 50 ° to 8 bar

at 70 ° to 6 bar

Heat resistant up to 80 °

Each flow control is checked bar after installation for leaks with 6 bar!

Pressure test of solenoid valve-resistant to 5 bar.

Pressure testing of the quartz multi-stage water filter

Pressure-resistant:

at 20 ° to 10 bar


at 40 ° to 8 bar

at 60 ° to 6 bar

Heat resistant up to 60 °

Mounting dimensions of filter:

Quarz-Waterfilter

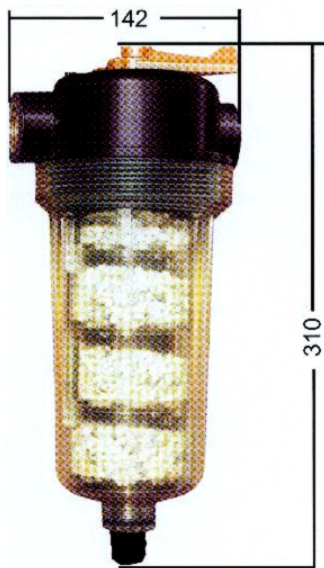

Filter Typ 500

